



SL927 anti-drop

**Motor:**

on board

Lighting:

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (SL927 52cm)

1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (SL927 85cm)

Control Panel:

Chromed 4 speeds push-button 4 speeds + light switch + timer + Antidrop System

Grease filter:

Anodized aluminum (5+1layers)

Material:

Painted stainless steel and glass panel

Finishing:

Black / White

Dimension:

52-85cm

Installation:**Cut Out:**

Create a niche in the cabinet for

505x270mm (SM927 52cm version)

835x270mm (SM927 85cm version)

Technologies

The hood SL927 anti-drop is equipped with the following technologies



ANTI-DROP SYSTEM

This is an innovative anti-condensation system, based on thermal resistances inside the glass panels or the stainless steel panels.

By heating the surface in contact with the vapours coming from the induction hob, this system does not allow condensation or water drops to develop and fall on the hob.




LIGHTING

The latest generation LEDs in our range hoods allow to manage light intensity by increasing or decreasing its power and choose colour temperature from warm to cold light (from 2700°K to 6500°K), thus adapting hood lighting to the light of your domestic environment.

The lighting surface in our lighting system is perfectly homogeneous since there are no overshadows.



6500°K 2700°K

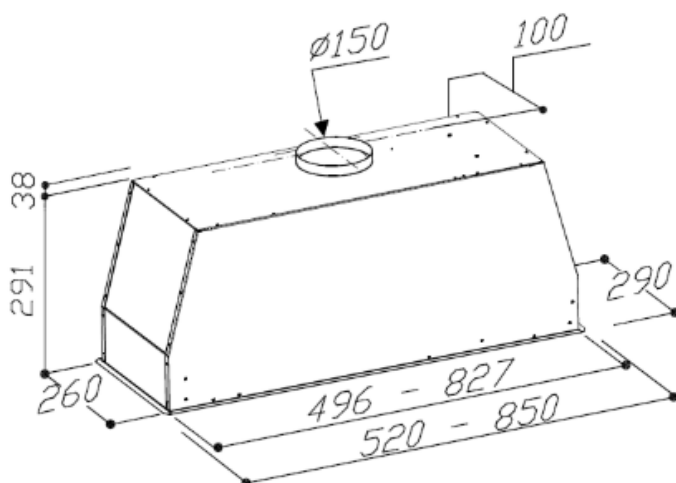

Sirius
