
SLTC122

SLTC122



Motor on board


Motor: GPE837



Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 90cm version

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 60cm version



Control panel:

Touch Control 4 speeds

light switch + timer + Antidrop System

Grease filter:

Anodized aluminum (5+1 layers)


Material:

Stainless Steel AISI430

Finishing:

Inox

Dark anthracite painted (PVD effect)

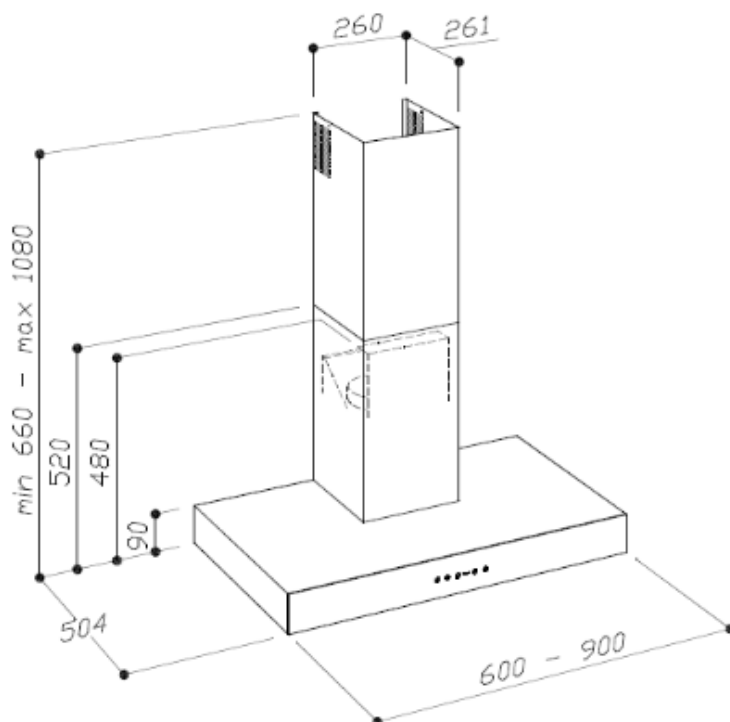

Technologies

The hood SLTC122 is equipped with the following technologies




ANTI-DROP SYSTEM

This is an innovative anti-condensation system, based on thermal resistances inside the glass panels or the stainless steel panels.

By heating the surface in contact with the vapours coming from the induction hob, this system does not allow condensation or water drops to develop and fall on the hob.



LIGHTING

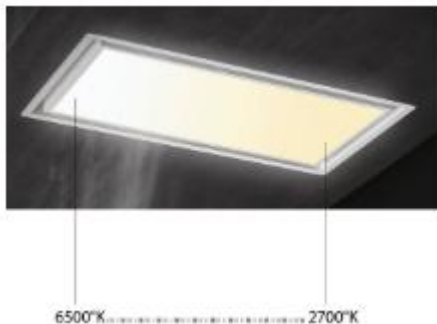

The latest generation LEDs in our range hoods allow to manage light intensity by increasing or decreasing its power and choose colour temperature from warm to cold light (from 2700°K to 6500°K), thus adapting hood lighting to the light of your domestic environment.

The lighting surface in our lighting system is perfectly homogeneous since there are no overshadows.